

Bevel Gear Jack makes easy movement for all kinds of lifting and position applications.



Traveling Nut



- Machined Aluminum Housing, Acme or Ball lifting Screw
- Rotating, Translating - Lifting Heights from 1-10 foot
- Ratio 1-1, 1-2. Load capacity 1/2 Ton, 1 Ton, 1.5 Ton, 2.5 Ton
- Single or Multi-Input shaft sizes: 10mm, 15mm, 20mm, 25mm




Advantages: In-Line Connection, Low Ratio, Fast Adjustment

Model	R-PL16	R-PL20	R-PL25	R-PL32
Rated Dynamic Load (N)	1000	2000	3000	5000
Screw Diameter and Lead	16,5 16,10 16,16	20,5 20,10 20,20	30,5 30,10 30,25	32,5 32,10 32,20 32,32
Input Shaft Diameter (mm)	10	15	20	25
Gear Ratio	1:1 2:1	1:1 2:1	1:1 2:1	1:1 2:1
Max Input Power (kW)	0.75	1.5	2.5	4
Max Input Speed (rpm)	1000	1000	1000	1000
Efficiency (%)	45	45	45	45
Housing Material	6061 Aluminum Alloy			

Ordering: R-PL16 - C-2 (Shown)
Model - Style - Ratio

3D drawings available upon request

Elegance & Style

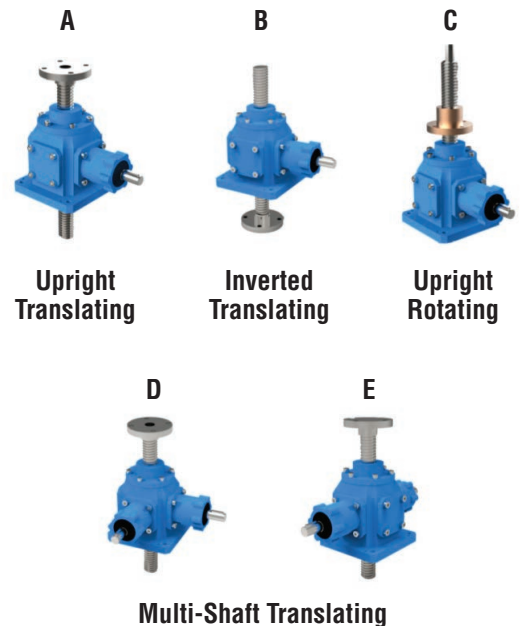

Rotary Timing/Control Products